


LED TRACK LIGHTS SERIES

PRODUCT
COLLECTION

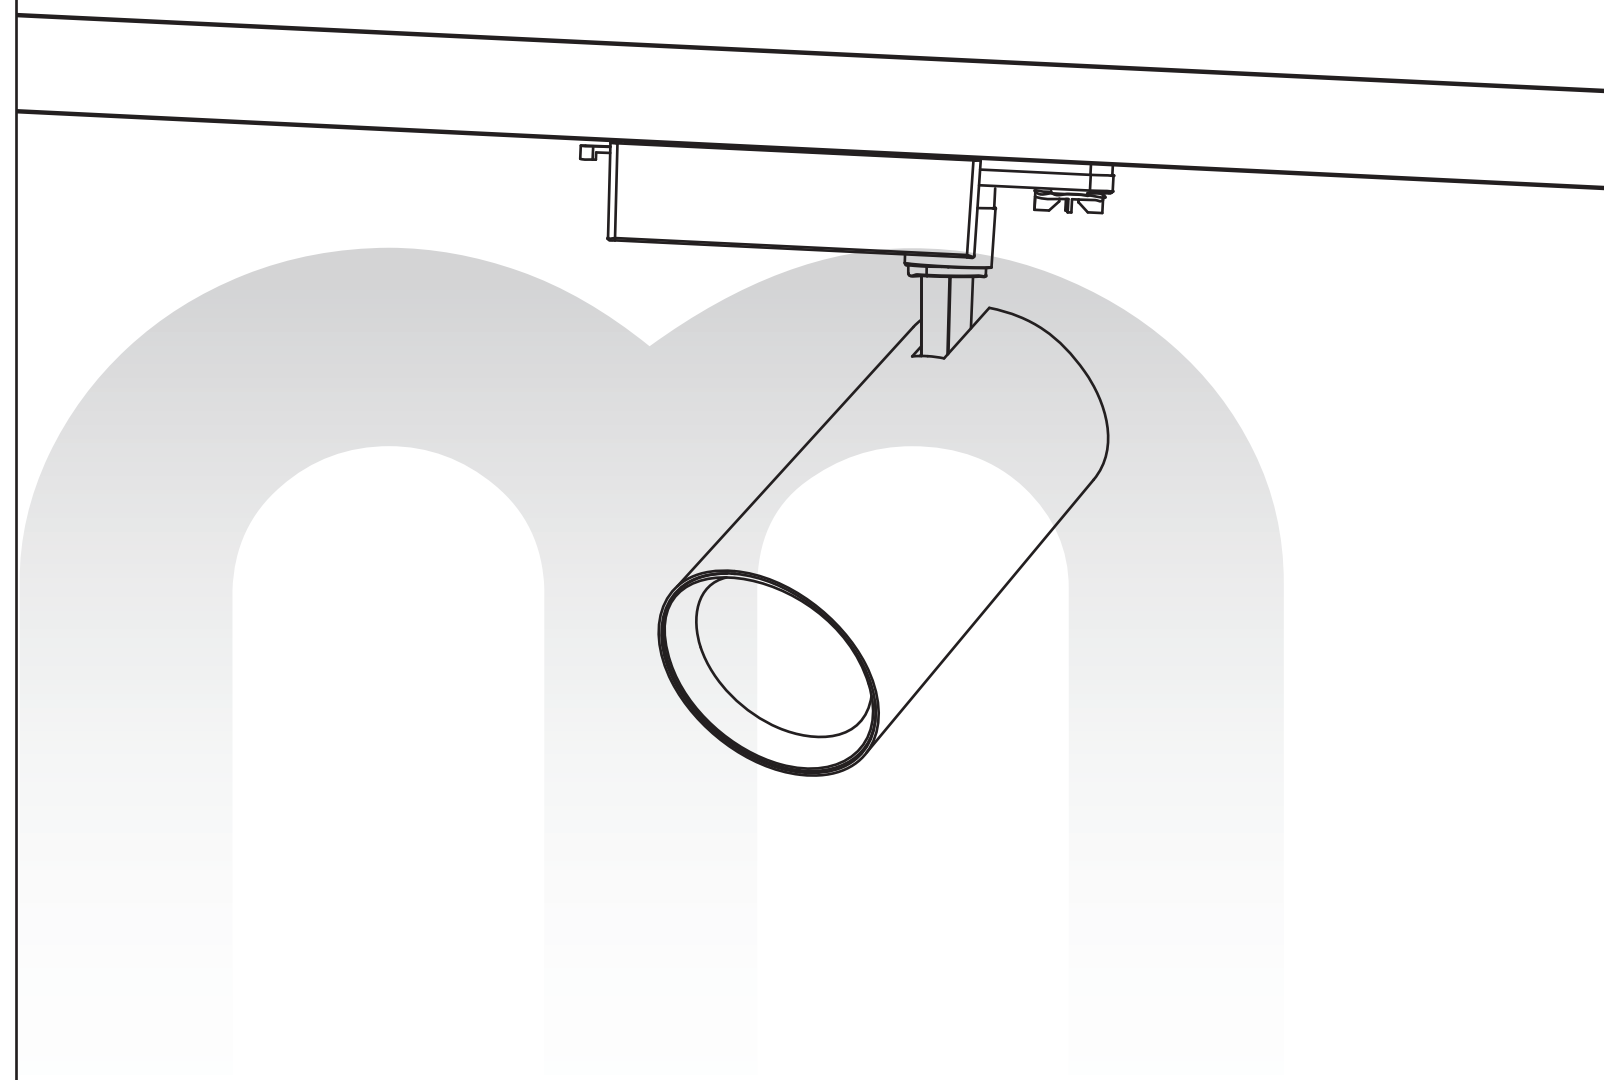

TEL : +86-755-29197332

FAX : +86-755-29197301


E-mail : info@upshine.com

Web : www.upshine.com

Add : 2nd building Dingfeng High-Tech Zone, Fuyuan 1st Road,
Fu Yong Sub-district, Bao'an, Shenzhen China 518103

Up-shine Lighting Co., Limited



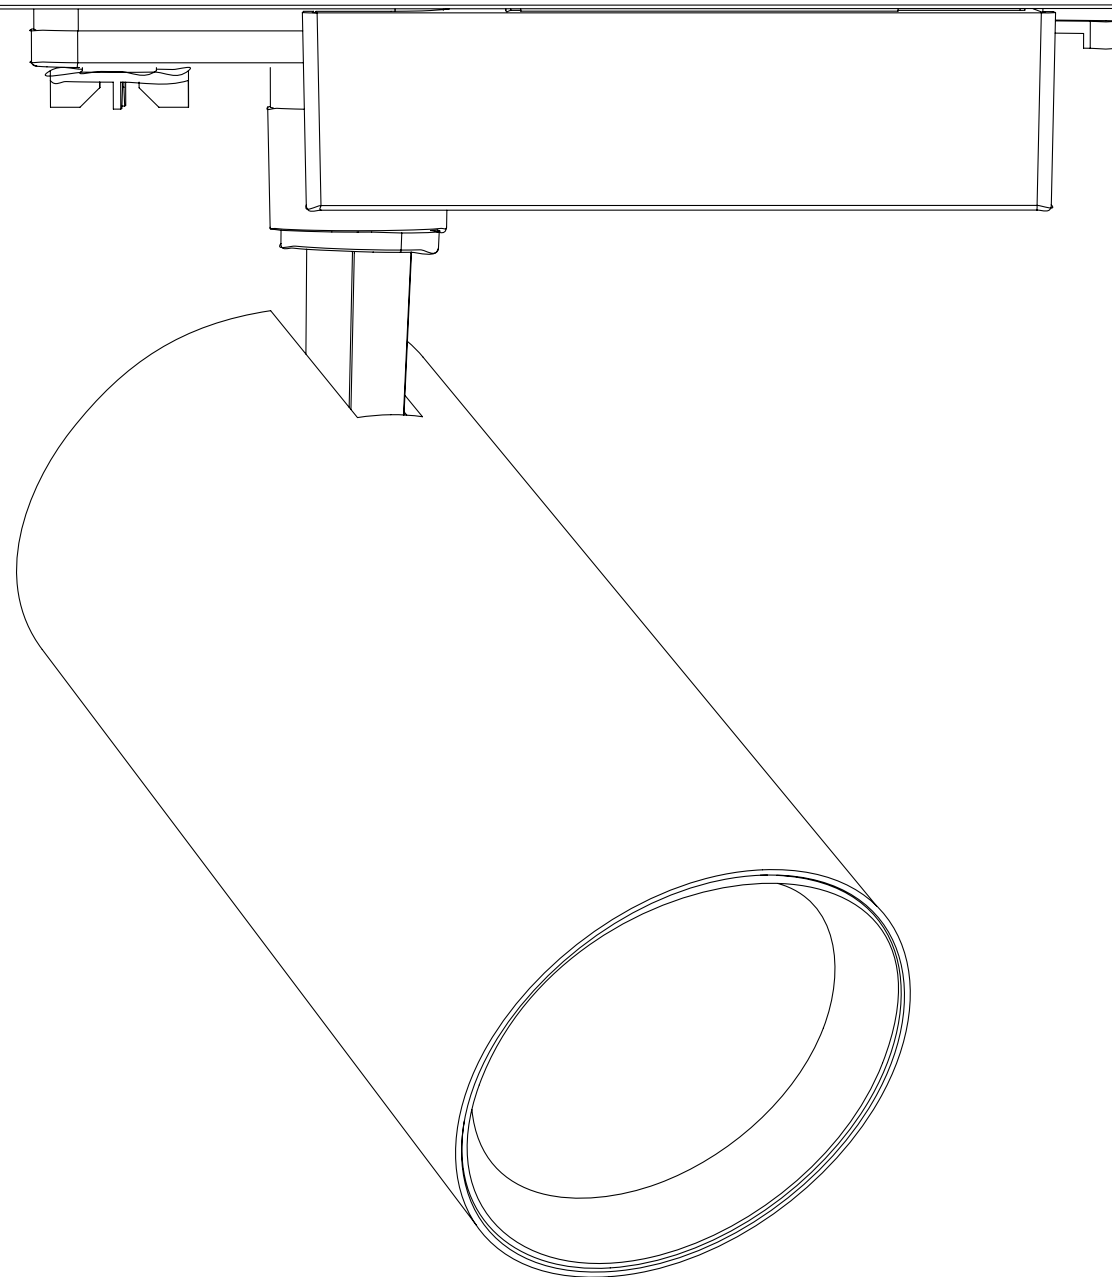


LED Track Light /Series/

LED track light has been around for decades, yet it remains as fresh and contemporary a ceiling light fixture as ever. This is due primarily to its pure modern look, with clean, rigid tracks and streamlined directional heads. But function is also a factor when it comes to a track lighting system, with each of the selected track heads independently and easily adjustable and brightly focused. Complete track lighting kits will also allow you to have a stylish ceiling track lighting systems instantly. Upshine various track light could be your excellent choice!



TL228 Track light



TL228 anti-glare design track light is with high lumen COB and flicker free internal driver. AL6063 aluminum lamp body provides excellent heat dissipation. Special PMMA lens design reaches anti-glare effect and creates a comfortable visual experience. Multiple beam angle lens optional .

Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL228-10W	10W	249x157xØ65x84	1100lm	0.50	12PCS
TL228-15W	15W	249x157xØ65x84	1300lm	0.50	12PCS
TL228-20W	20W	269x178xØ85x93	2250lm	0.76	12PCS
TL228-25W	25W	269x178xØ85x93	2700lm	0.76	12PCS
TL228-30W	30W	302x211xØ100x108	3050lm	1.10	12PCS
TL228-40W	40W	302x211xØ100x108	4200lm	1.10	12PCS

CCT

2700K

3000K

4000K

5000K

Finish

White

Black

Interchangeable lens options

24°/30°/45° for 10W/15W

24°/36°/60° for 20W/25W/30W/40W





TL29A/C



TL29B/D




TL29E





TL29F

TL29 Track Light /Series/

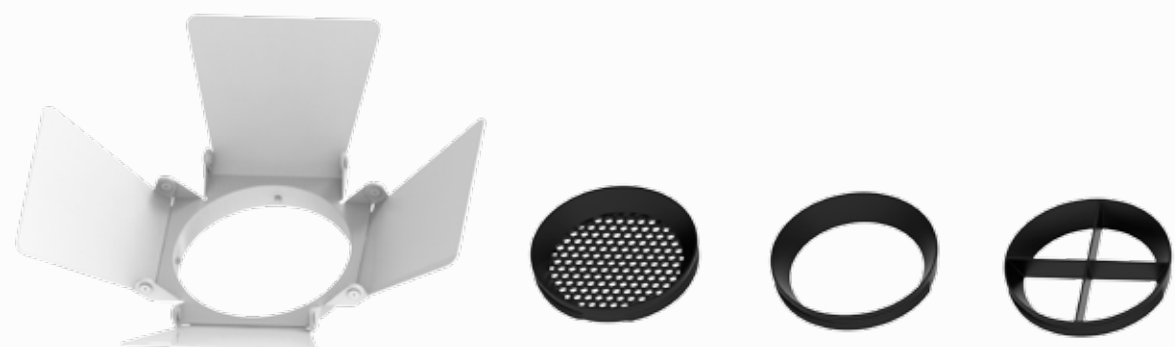



TL29A Track light




Upshine driverless track light adopts high quality brand DOB led light source, supreme 6063 aluminum, anti-glare PMMA lens and interchangeable reflectors and trim, creating a diversified and dramatic atmosphere for targeted objects in different accent lighting situations.

Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL29A-20W	20W	261x170xØ85x93	1560lm	0.55	12PCS
TL29A-30W	30W	291x200xØ100x108	2550lm	0.79	12PCS
TL29A-40W	40W	291x200xØ100x108	3400lm	0.79	12PCS


CCT




Finish



Trims Accessories




TL29B Track light




Upshine track light adopts brand Citizen cob led light source, supreme 6063 aluminum, anti-glare PMMA lens and interchangeable reflectors and trim.

Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL29B-12W	12W	202x150xØ65x188	1200lm	0.52	12PCS
TL29B-25W	25W	202x170xØ85x206	2750lm	0.75	12PCS
TL29B-35W	35W	232x200xØ85x206	3675lm	0.79	12PCS
TL29B-42W	42W	232x200xØ100x220	4410lm	1.05	12PCS


CCT



Finish




Trims Accessories





TL29C Track light



It adopts brand Citizen COB , Supreme 6063 aluminum heat sink and anti-glare PMMA lens achieving high quality, great heat dissipation and lighting distribution. Standard, honeycomb, shutter different trims for option.

Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL29C-12W	12W	243x150xØ65x84	1200lm	0.47	12PCS
TL29C-25W	25W	291x200xØ85x93	2750lm	0.68	12PCS
TL29C-35W	35W	291x200xØ100x108	3675lm	0.79	12PCS

CCT

2700K

3000K

4000K

5000K

Finish

White

Black

Silver

Trims Accessories

Barn Door


Honeycomb Louver

Standard

Cross Louver



TL29D Track light



Upshine track light adopts brand SMD LED light source, supreme 6063 aluminum heat sink, anti-glare PC lens, simple design structure and 4 types reflectors and trim for option.

Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL29D-20W-C3	20W	202x170xØ85x206	1800lm	0.75	12PCS
TL29D-30W-C3	30W	232x200xØ85x206	2600lm	0.79	12PCS

CCT

3000K

4000K

5700K

Finish

White

Black

Silver

Trims Accessories

Barn Door

Honeycomb Louver

Standard

Cross Louver





TL29E Track light

AC
220-240V

CRI≥80


CRI≥90

CRI≥97

IP20

RoHS

CE



It's adopts interchangeable reflectors and trim, changeable lighting orientation with 350° in horizontal direction and 90° in vertical direction and integrated design of driver and adapter.

Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL29E-25W	25W	258x170xØ85x198	2750lm	0.65	12PCS
TL29E-35W	35W	288x200xØ85x198	3675lm	0.68	12PCS

CCT

2700K

3000K

4000K

5000K

Finish

White

Black

Silver

Trims Accessories

Barn Door

Honeycomb Louver

Standard

Cross Louver



TL29F Track light

AC
220-240V

CRI≥80

CRI≥90


CRI≥97

IP20

Tridonic DALI

RoHS

CE



Upshine track light with Tridonic DALI driver adopts brand Citizen cob led light source, supreme 6063 aluminum, PC lens and interchangeable reflectors and trim.

Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL29F-25W	25W	298x170xØ85x198	2610lm	0.90	12PCS
TL29F-35W	35W	328x200xØ85x198	3490lm	0.95	12PCS
TL29F-42W	42W	328x200xØ100x198	4110lm	1.20	12PCS

CCT

2700K

3000K

4000K

5000K

Finish

White

Black

Silver

Trims Accessories

Barn Door

Honeycomb Louver

Standard

Cross Louver



TL57A Track light

15°

24°

36°

AC
220-240V

PF≥0.9

CRI≥80

IP20

350°

90°

RoHS

CE


CB




It is with internal driver, ADC12 die-casting Aluminum body for good heat dissipation, Secondary optics with lens and reflector make more uniform light. It adopts CITIZEN COB with high efficiency as 110lm/w and CRI80 /CRI90/CRI97 available.Adjustable lighting orientation with 350° in horizontal direction and 90° in vertical direction with bring a flexible exposure.

Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL57A-15W	15W	223x127xØ65x84.5	1750lm	0.49	12PCS
TL57A-25W	25W	254x157xØ80x84.5	2850lm	0.79	12PCS
TL57A-35W	35W	259x167xØ100x84.5	4000lm	1.03	12PCS

CCT



Finish



TL58A Track light

15°

24°

36°

AC
200-240V

PF≥0.9

CRI≥80

IP20


350°

90°

RoHS

CE


CB



It is with internal driver, ADC12 die-casting Aluminum body for good heat dissipation, Secondary optics with lens makes more uniform light. It adopts CITIZEN COB with high efficiency as 110lm/w and CRI80 /CRI90/CRI97 available.Adjustable lighting orientation with 350° in horizontal direction and 90° in vertical direction with bring a flexible exposure.

Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL58A-15W	15W	227x131xØ65x84.5	1650lm	0.52	12PCS
TL58A-25W	25W	249x152.5xØ80x84.5	2750lm	0.82	12PCS
TL58A-35W	35W	259x167xØ100x84.5	3850lm	1.10	12PCS

CCT



Finish





TL40A Track light

25°

10°x25°

25°x25°

25°x36°

36°

4°x36°

10°x36°

36°x36°

AC
220-240V

CRI≥80

IP20

350°

90°

RoHS

CE

TL40A unique design track light adopts brand CREE chip and supreme Aluminum heat sink. It is with interchangeable diffuser to reach eight different beam angle that helps to expand the application range.

Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL40A-7W	7W	230xØ54x90x156	550lm	0.45	24PCS
TL40A-10W	10W	230xØ54x90x156	740lm	0.45	24PCS

CCT

3000K

4000K

5000K

5700K

Finish

White

Black

Silver



TL40B Track light

15°

24°

36°

AC
220-240V

CRI≥80

IP20

350°

90°

RoHS

CE

TL40B is a new design track light adopts Citizen chip, high quality LED source and supreme Aluminum heat sink to create a diversified and dramatic atmosphere.

Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL40B-10W	10W	236xØ54x90x162	1000lm	0.45	24PCS
TL40B-12W	12W	236xØ54x90x162	1200lm	0.45	24PCS

CCT

2700K

3000K

4000K

5000K

Finish


White

Black

Silver



TL25 Track light



It's adopts Citizen LED, adjustable lighting orientation with 360 degree in horizontal direction and 180 in vertical direction and 1-circuit adapter, 3-circuit adapter available for wide choice.

Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL25-15W	15W	170xØ83x68x102	1470lm	0.38	18PCS
TL25-25W	25W	215xØ118.5x90x146	2600lm	0.68	12PCS
TL25-35W	35W	215xØ128x105x161	3600lm	0.85	12PCS
TL25-45W	45W	215xØ128x105x161	4410lm	0.85	12PCS

CCT

2700K

3000K

4000K

5000K

Finish

White


Black

Silver

Dimming button (100% down to 5%)



TL25B Track light



It's adopts Citizen LED, adjustable lighting orientation with 360 degree in horizontal direction and 180 in vertical direction and 1-circuit adapter, 3-circuit adapter available for wide choice.

Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL02B-25W	25W	247xØ90x118x207	2600lm	0.75	12PCS
TL02B-35W	35W	262xØ105x128x207	3600lm	0.92	12PCS
TL02B-45W	45W	262xØ105x128x207	4410lm	0.92	12PCS

CCT

2700K

3000K

4000K

5000K

Finish


White

Black

Silver




TL02 Track light




It's a very popular full family traditional track spot. 12W, 25W, 35W, 45W are all available. Branded CREE / CITIZEN led chips provide super soft light output.

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL02-12W	12W	126.5x89x220	1380lm	0.70	12PCS
TL02-25W	25W	141x91x233	2500lm	1.17	12PCS
TL02-35W	35W	161x110x234	3600lm	1.30	8PCS
TL02-45W	45W	161x110x234	4380lm	1.30	8PCS


CCT



Finish




TL45 Track light



TL45 LED track light adopts high lumen brand CITIZEN led .Aluminum heat sink provides excellent heat dissipation, even light output without glare & dark spot. Adjustable lighting orientation with 350 degree in horizontal direction and 180 in vertical direction provided. 1-circuit adapter, 3-circuit adapter offered for wide choice.

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL45-40W	40W	248xØ132.5x189.5	4080lm	1.45	8PCS
TL45-50W	50W	248xØ132.5x189.5	5000lm	1.45	8PCS

CCT



Finish





TL62 Track light



AC
220-240V

PF 0.9

CRI≥80


IP20





RoHS


CE

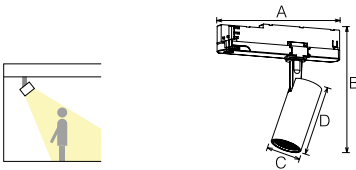


TL62 track light is with simple structure design. Integrate driver and 3 circuits adapter. Adopt brand CREE LED and lens for accent lighting. ADC12 aluminum light body provides excellent heat dissipation. Adjustable lighting orientation with 350° in horizontal direction and 90° in vertical direction.

Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL62-8W	8W	196x180xØ46x100	600lm	0.27	30PCS
TL62-12W	12W	196x200xØ46x120	880lm	0.30	30PCS
TL62-16W	16W	196x200xØ46x120	1080lm	0.30	30PCS

CCT



Finish



TL16 Track light









AC
100-240V

PF≥0.9

CRI≥80

IP20










RoHS

CE




Up-shine patent mini track lights adopts brand CITIZEN COB. Color changeable and triac dimmable are both available that can be compatible with global brand dimmer.

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL16-12W	12W	Ø62x100x182	1350lm	0.46	20PCS

CCT



Finish





TL56 Track light

AC
220-240V

PF 0.9

CRI≥80

CRI≥90

CRI≥97

IP20

RoHS

CE


CB



TL56 track light is with adjustable beam angle varying from 15°to 60°, .Adopt brand CITIZEN LED with CRI80/90/97 optional . Changeable lighting orientation with 350° in horizontal direction and 90° in vertical direction. Aluminum heat sink provides excellent heat dissipation.

Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL56-15W	15W	234x137xØ65x84.5	1500lm	0.69	12PCS
TL56-25W	25W	260x163xØ80x84.5	2500lm	0.89	12PCS
TL56-30W	30W	265x173xØ100x84.5	3000lm	1.15	12PCS

CCT



Finish



TL17 Track light

AC
200-240V


PF≥0.9

CRI≥80

IP20

RoHS


CE



With an adjustable beam angle, TL17 LED track light plays a leading role in adopting a manual zoom stretch head. One track light with flexible beam angle varies from 10°- 60°, creating a diversified and dramatic atmosphere for targeted objects in different accent lighting situations.


Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL17-35W	35W	Ø100x301	1790~3720lm	1.53	6PCS

CCT



Finish



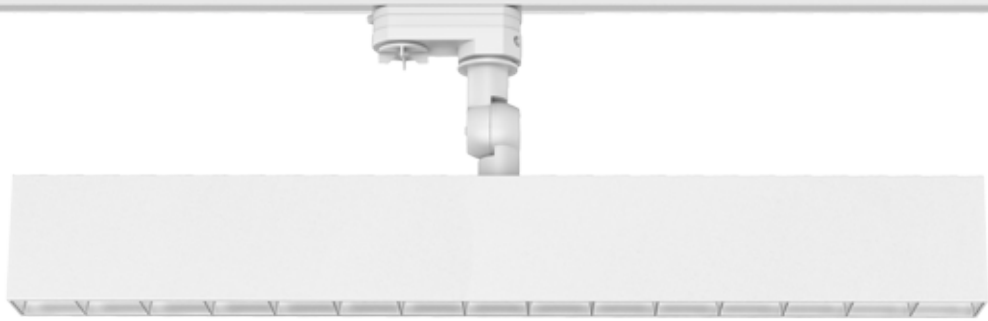

TL49 Track light



AC
220-240V

PF 0.9

CRI≥80

IP20








RoHS


CE

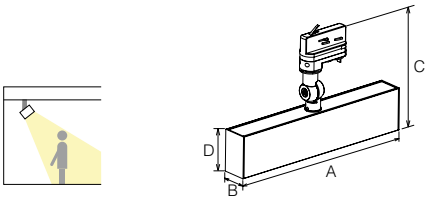

TL49 is a linear track lights with UGR<19 louver reflector design and 320mm/420mm/530mm three sizes optional . Adopt 2835SMD chip, , white/black 6063 aluminum housing optional Adjustable lighting orientation with 350° in horizontal direction and 220° in vertical direction.

Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL49-15W	15W	319.5x42x195.5x70	1450lm	0.74	12PCS
TL49-30W	30W	424.5x42x195.5x70	2850lm	0.92	12PCS
TL49-37W	37W	529.5x42x195.5x70	3500lm	1.15	12PCS
TL49-45W	45W	529.5x42x195.5x70	4000lm	1.15	12PCS

CCT



Finish



TL50/-B Track light



AC
220-240V

PF≥0.9

CRI≥80


IP20





RoHS


CE



This linear track light with concise design adopts 6063 aluminum, slide switch for interchangeable CCT and high lumen efficiency, 105lm/W.

Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL50/-B-10W	10W	650x32.5x52x436	1000lm	0.43	12PCS
TL50/-B-16W	16W	650x32.5x52x436	1560lm	0.45	12PCS
TL50/-B-25W	25W	1212x32.5x52x496	2550lm	0.76	12PCS
TL50/-B-30W	30W	1212x32.5x52x496	3000lm	0.76	12PCS
TL50/-B-30W	30W	1493x32.5x52x496	3000lm	0.92	12PCS

CCT



Finish





TL04 Track light

24°

36°

AC
200-240V

PF≥0.9


CRI≥80

IP20

DIM

RoHS


CE




Upshine LED track light adopts high efficient reflector and COB LED chip with advanced light distribution technology without glare and maximum utilization of light output. Dimmable available and surface mounted and embedded installation optional.

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL04-10W	10W	162x102X85	1040lm	0.31	30PCS

CCT



Finish



TL04B Track light

36°

AC
200-240V

PF≥0.9


CRI≥80

IP20

DIM

RoHS


CE



Upshine LED track light adopts high efficient reflector and COB LED chip with advanced light distribution technology without glare and maximum utilization of light output. Dimmable available and surface mounted and embedded installation optional.

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL04B-10W	10W	111x107x156	1040lm	0.50	20PCS
TL04B-2x10W	20W	395x107x156	2080lm	1.20	8PCS
TL04B-3x10W	30W	625x107x156	3120lm	1.80	6PCS
TL04B-4x10W	40W	855x107x156	4160lm	2.40	4PCS
TL04B-4x10W(S)	40W	295x291x156	4160lm	2.10	4PCS

CCT





Finish






TL13/B Track light

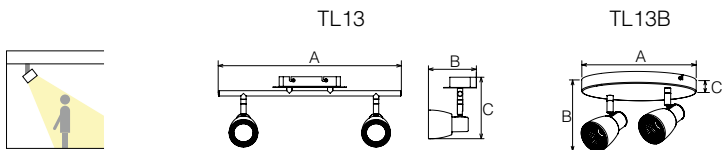

It's adopts die-casting ADC12, high efficient COB led chip and adjustable lighting orientation with 350 degree in horizontal direction and 35 in vertical direction provided. Lamp with easy surface mounted installation.

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL13-10W	10W	204x117.5x148	800lm	0.70	12PCS
TL13-20W	20W	449x117.5x148	1600lm	1.00	6PCS
TL13-30W	30W	774x117.5x148	2400lm	1.30	6PCS
TL13B-10W	10W	Ø80x161x25	800lm	0.32	24PCS
TL13B-20W	20W	Ø240x161x25	1600lm	0.93	12PCS
TL13B-30W	30W	Ø240x161x25	2400lm	1.16	12PCS


CCT



Finish




TL14 Track light



Upshine ceiling spotlight adopts die-casting ADC12, high efficient COB led chip and high transmittance glass to achieve excellent heat dissipation, high center luminous and maximum utilization of light output.

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL14-10W	10W	102x97.5x145	800lm	0.30	36PCS

CCT



Finish





TL19 Track light

36°

60°

AC
100-240V

AC
200-240V

PF≥0.9

CRI≥80


IP20

DIM

SAA

RoHS

CE

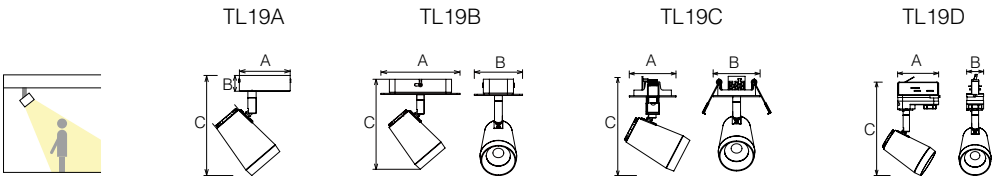

Upshine ceiling spotlight adopts die-casting ADC12, high efficient COB led chip and transmittance optical lens to assure excellent heat dissipation, high center luminous intensity, maximum utilization of light output. Dimmable available, compatible with a wide range of recommended Triac dimmers and Surface mounted, track adaptor and recessed installations to meet different demands.

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL19A-10W	10W	Ø80x25x158	1055lm	0.28	24PCS
TL19A-20W	20W	Ø240x25x158	2110lm	0.84	12PCS
TL19A-30W	30W	Ø240x25x158	3165lm	1.02	12PCS
TL19B-10W	10W	140x80x160	1055lm	0.48	24PCS
TL19B-20W	20W	250x80x160	2110lm	0.90	12PCS
TL19B-30W	30W	370x80x160	3165lm	1.28	12PCS
TL19C-10W	10W	78x78x167	1055lm	0.28	24PCS
TL19D-10W	10W	85x32x175	1055lm	0.28	24PCS

CCT

2700K

3000K

4000K

5000K

Finish

White

Black

Silver



TL19A

TL19B

TL19C

TL19D



TL19A-10W

TL19A-20W

TL19A-30W




TL19B-10W

TL19B-20W

TL19B-30W

LED Track light

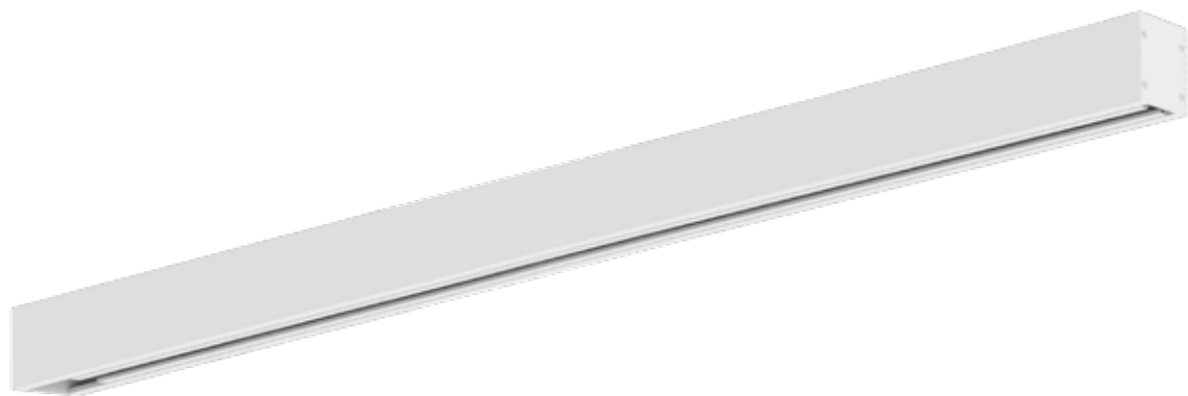

DB38 Linear light

90°

AC
90-305V

AC
100-277V


PF 0.9

CRI≥80

IP20

RoHS

CE



DB38 the new suspended batten designed as double-sided lamp, upper side with standard light, under side with additional track light; Standard suspended installation and splicing connection both available, Adopts Global track and built-in isolated flicker free 0/1-10V dim driver solution.

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB38-600-20W	20W	575x50x76	1800lm	1.98	6PCS
DB38-1200-38W	38W	1075x50x76	3600lm	2.92	6PCS

CCT

3000K

4000K

5000K


5700K

Finish

White





Track System

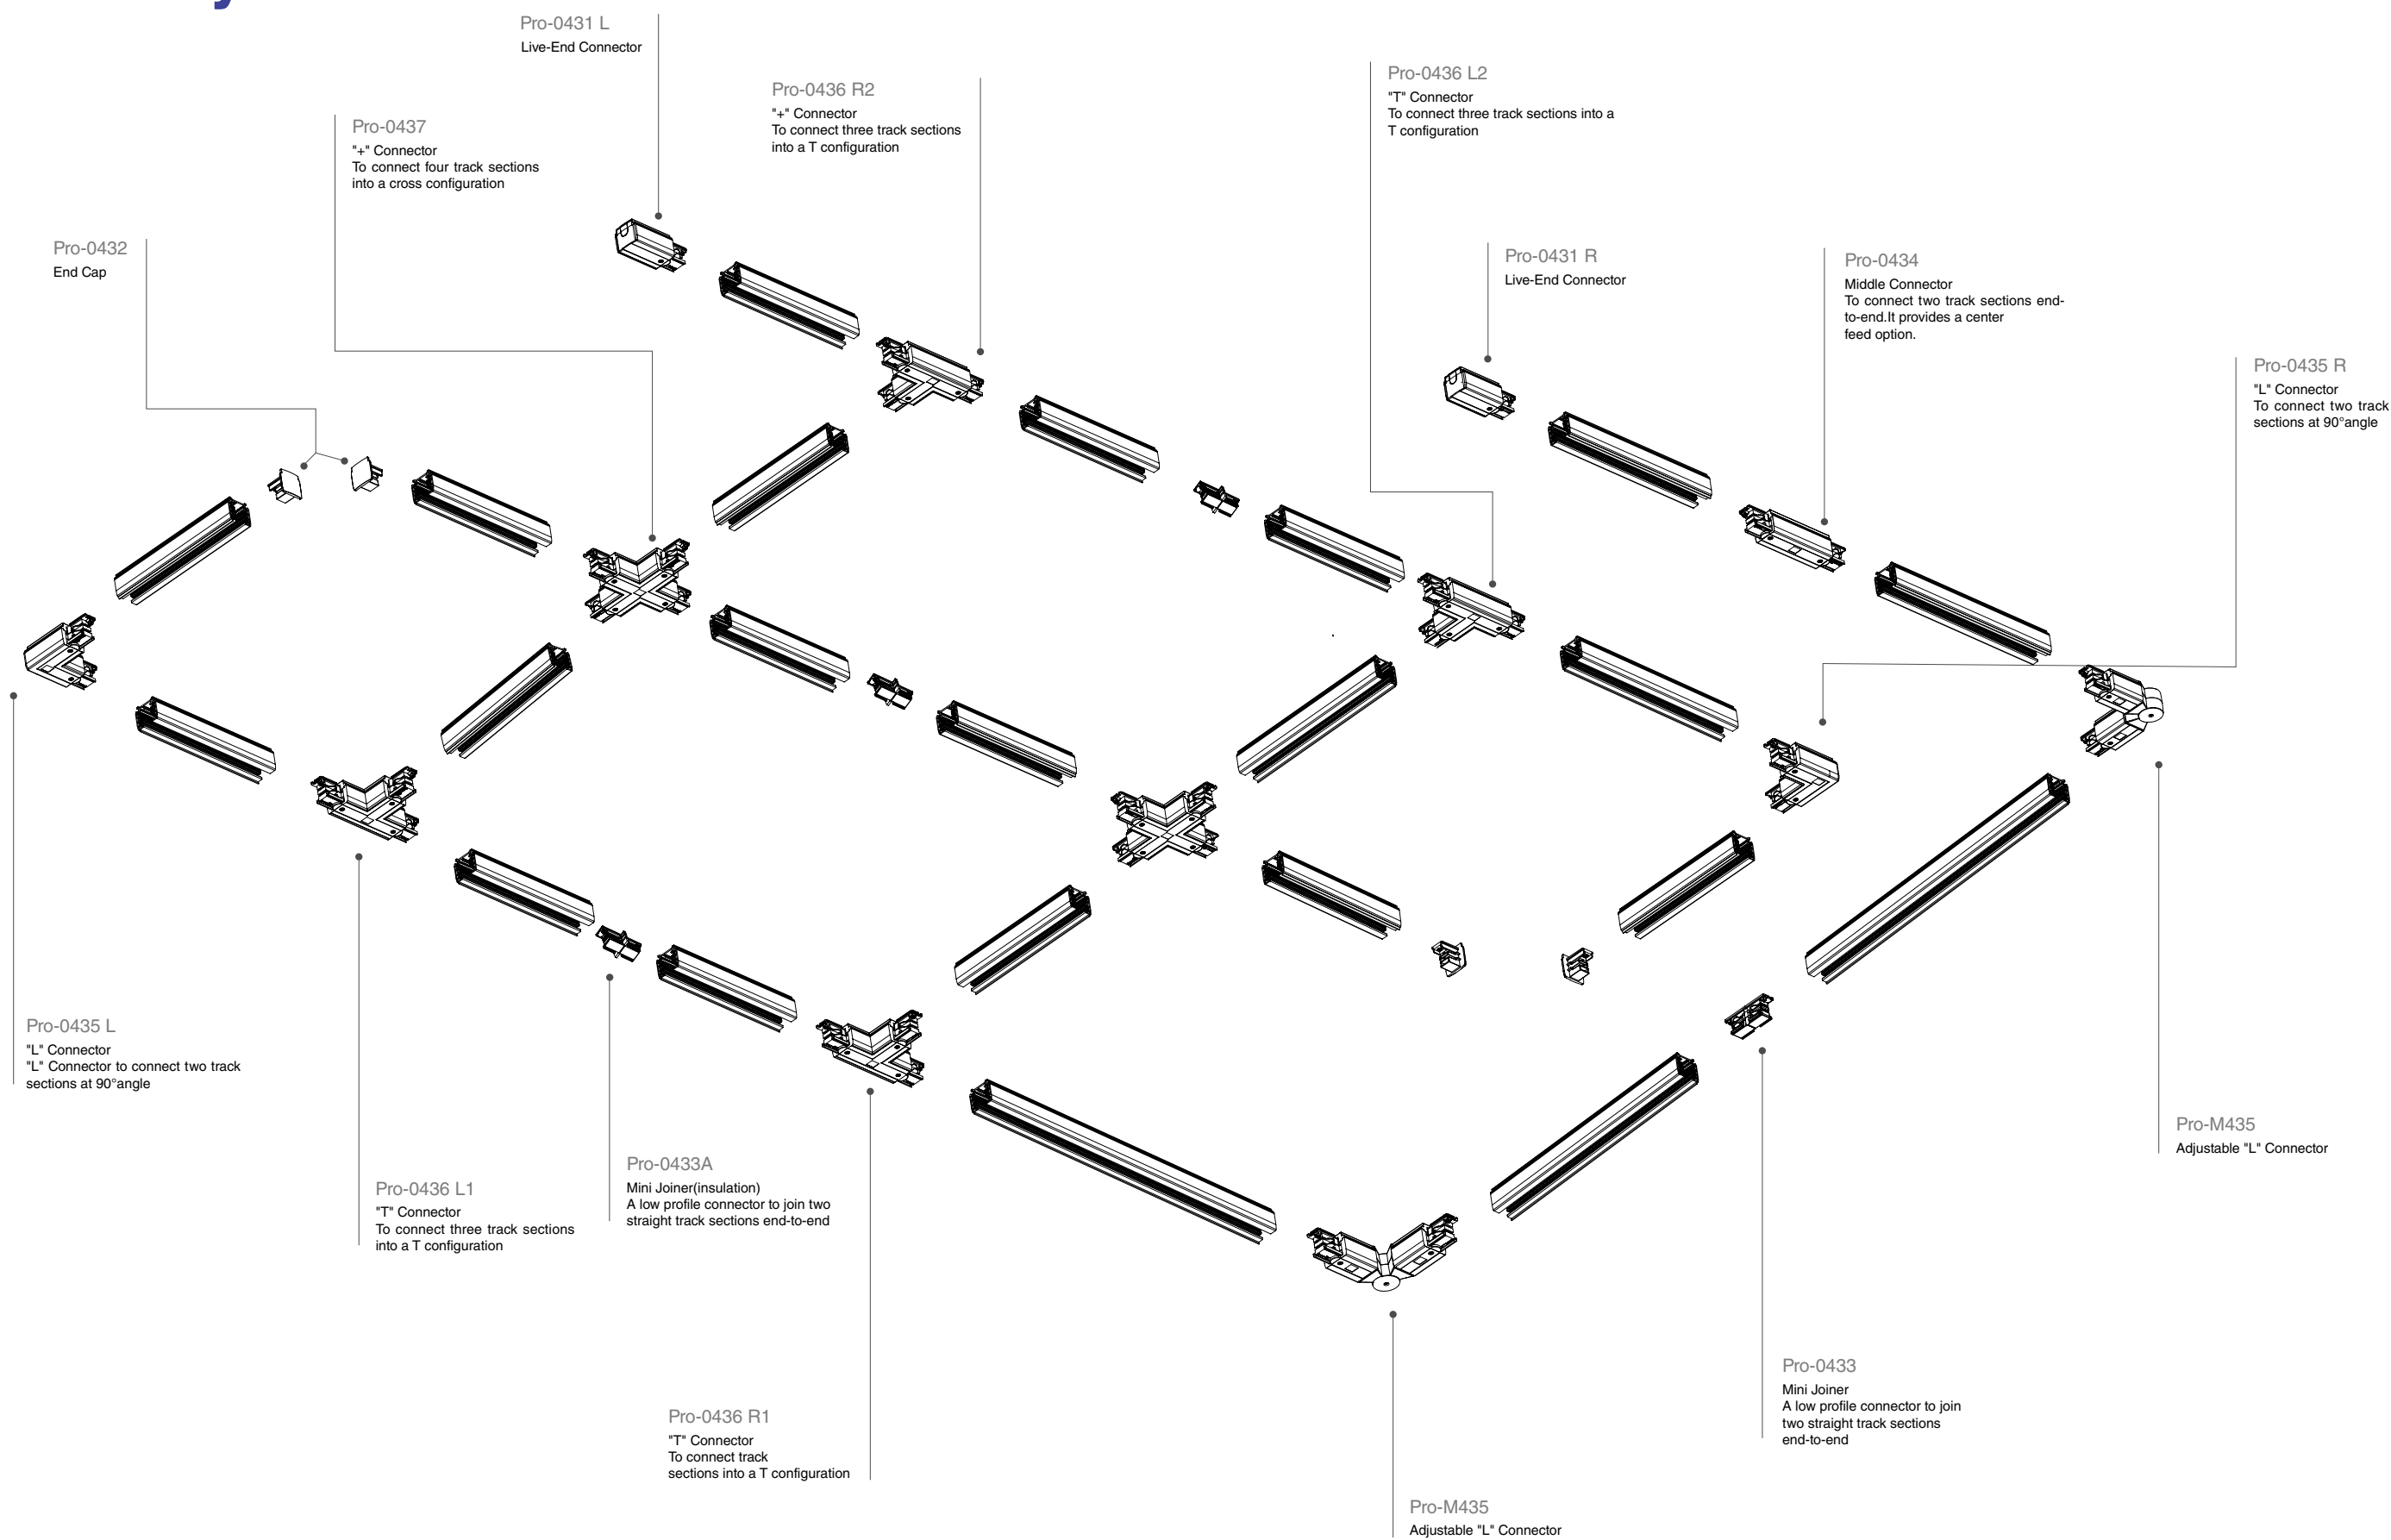




3 Circuits Track System

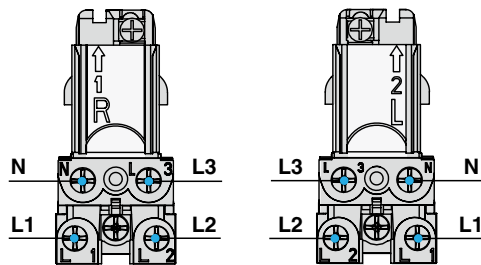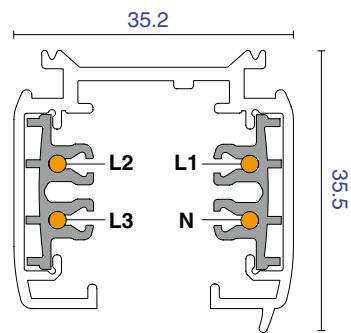


Model No.	Track length	Shell Material	Colour			Package
Pro-0410-W / Pro-0410-S / Pro-0410-B	1M track actual one meter.(100cm)	Aluminum Extrusion	White	Silver	Black	1 / 12
Pro-0415-W / Pro-0415-S / Pro-0415-B	1.5M track actual one meter.(150cm)	Aluminum Extrusion	White	Silver	Black	1 / 12
Pro-0420-W / Pro-0420-S / Pro-0420-B	2M track actual one meter.(200cm)	Aluminum Extrusion	White	Silver	Black	1 / 12
Pro-0430-W / Pro-0430-S / Pro-0430-B	3M track actual one meter.(300cm)	Aluminum Extrusion	White	Silver	Black	1 / 8
Pro-04400-W / Pro-04000-S / Pro-04000-B	4M track actual one meter.(400cm)	Aluminum Extrusion	White	Silver	Black	1 / 6

Live-End Connector

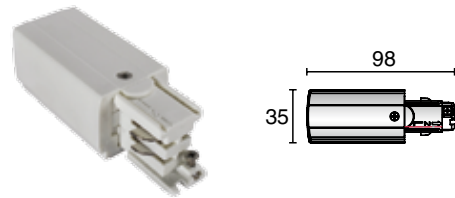


Model No.	Package	Colour
Pro-0431 L-W	1 / 150	White
Pro-0431 L-S	1 / 150	Silver
Pro-0431 L-B	1 / 150	Black

Live-End Connector

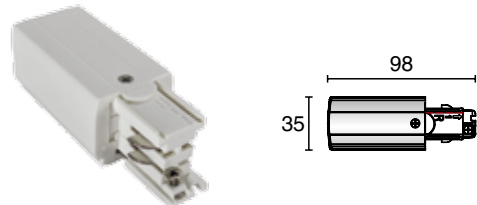


Model No.	Package	Colour
Pro-0431 R-W	1 / 150	White
Pro-0431 R-S	1 / 150	Silver
Pro-0431 R-B	1 / 150	Black

Mini Joiner

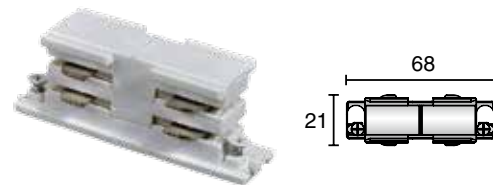

Model No.	Package	Colour
Pro-0433-W	1 / 400	White
Pro-0433-S	1 / 400	Silver
Pro-0433-B	1 / 400	Black

Mini Joiner(insulation)

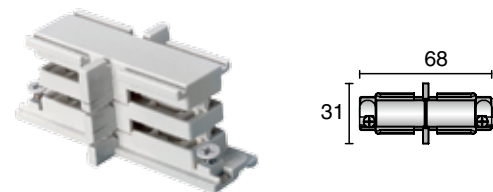


Model No.	Package	Colour
Pro-0433A-W	1 / 150	White
Pro-0433A-S	1 / 150	Silver
Pro-0433A-B	1 / 150	Black

End Cap




Model No.	Package	Colour
Pro-0432-W	1 / 500	White
Pro-0432-S	1 / 500	Silver
Pro-0432-B	1 / 500	Black

Mini Joiner(insulation)

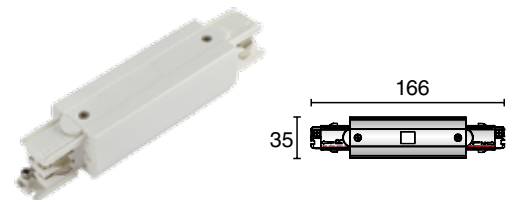

Model No.	Package	Colour
Pro-0434-W	1 / 150	White
Pro-0434-S	1 / 150	Silver
Pro-0434-B	1 / 150	Black

Twisted "L" Connector

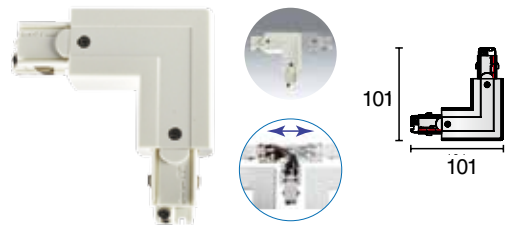


Model No.	Package	Colour
Pro-0438-W	1 / 154	White
Pro-0438-S	1 / 154	Silver
Pro-0438-B	1 / 154	Black

"+" Connector




Model No.	Package	Colour
Pro-0437-W	1 / 60	White
Pro-0437-S	1 / 60	Silver
Pro-0437-B	1 / 60	Black

Ceiling mount, EZCLIK suspension kit with ROD

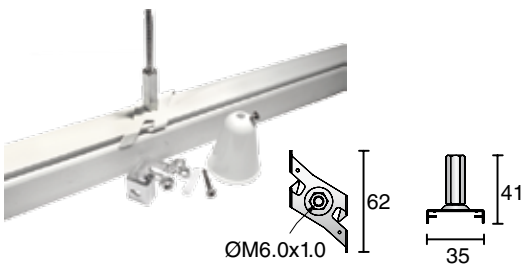


Model No.	Package	Colour
Pro-EZ0447-W	1 / 200	White
Pro-EZ0447-S	1 / 200	Silver
Pro-EZ0447-B	1 / 200	Black

Ceiling mount, EZCLIK suspension kit with wire

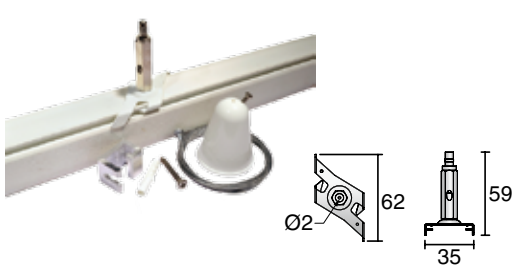


Model No.	Package	Colour
Pro-EZ0448-W	1 / 200	White
Pro-EZ0448-S	1 / 200	Silver
Pro-EZ0448-B	1 / 200	Black

Flexible Connector

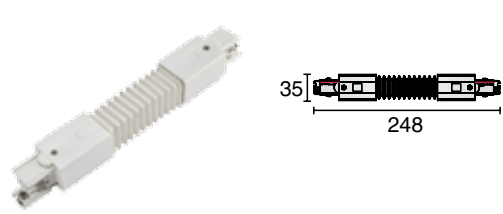


Model No.	Package	Colour
Pro-0439-W	1 / 119	White
Pro-0439-S	1 / 119	Silver
Pro-0439-B	1 / 119	Black

Adjustable "L" Connector

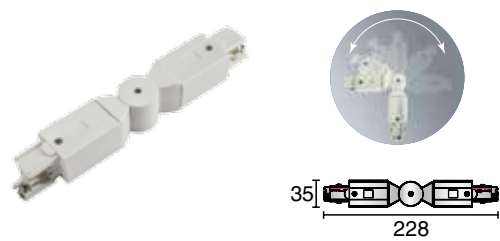

Model No.	Package	Colour
Pro-0435-W	1 / 119	White
Pro-0435-S	1 / 119	Silver
Pro-0435-B	1 / 119	Black


T-Bar, EZCLIK mounting kit

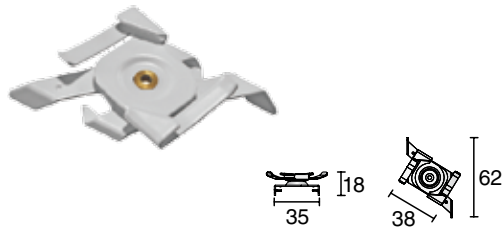


Model No.	Package	Colour
Pro-M146T-W	1 / 500	White
Pro-M146T-S	1 / 500	Silver
Pro-M146T-B	1 / 500	Black

Suspension Mounting Kits Manual


1) Adjust the EZCLICK Mounting Kit's Direction, put it vertically into the T-Bar ceiling, and then rotate right and fix (as picture shows).

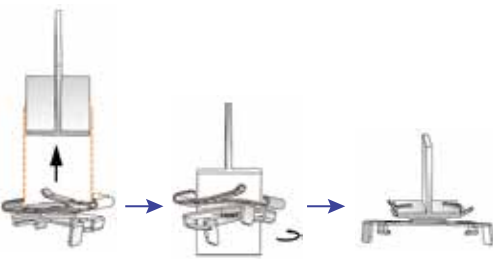

2) Adjust the EZCLICK Mounting Kit's Direction, put the track vertically into the EZCLICK Mounting Kit, rotate left and fix (like picture shows).

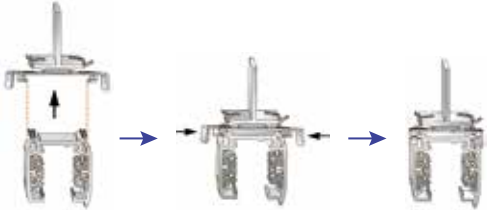


Ceiling Mount Reinforcement Plate with suspension wire

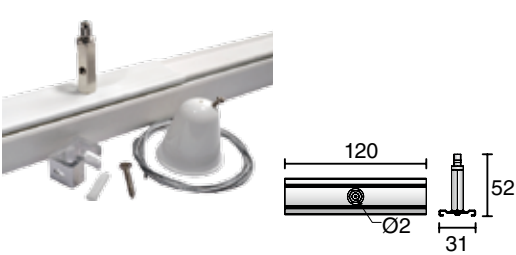


Model No.	Package	Colour
Pro-M147-W	1 / 200	White
Pro-M147-S	1 / 200	Silver
Pro-M147-B	1 / 200	Black

Ceiling Mount Reinforcement Plate with suspension rod

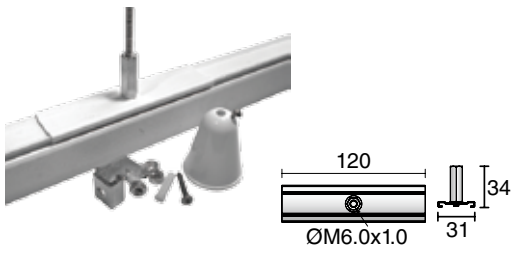


Model No.	Package	Colour
Pro-M148-W	1 / 200	White
Pro-M148-S	1 / 200	Silver
Pro-M148-B	1 / 200	Black

T-Bar, EZCLIK with Reinforcement Plate

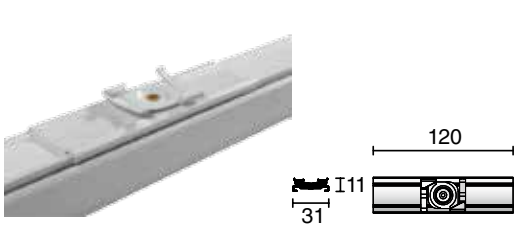

Model No.	Package	Colour
Pro-M149-W	1 / 200	White
Pro-M149-S	1 / 200	Silver
Pro-M149-B	1 / 200	Black


Suspension Hook

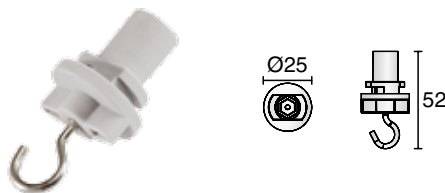


Model No.	Package	Colour
Pro-M142-W	1 / 500	White
Pro-M142-S	1 / 500	Silver
Pro-M142-B	1 / 500	Black

Suspension Mounting Kits Manual

1) Put the Track into the EZCLICK Mounting Kits Parallely (As picture shows).

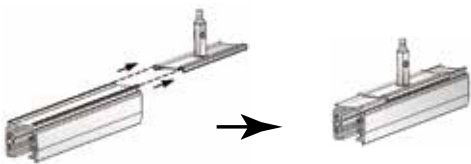


2) Release the start valve, press and get the wirerope through the EZCLICK Mounting Kit, rotate tight the start valve and lock the wirerope (like picture shows).

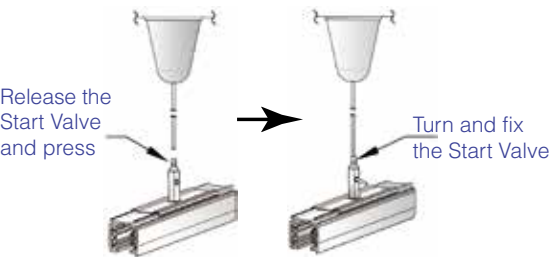


Suspension Mounting Kits Manual

1) Put the Track into the EZCLICK Kit Parallely (As picture shows).

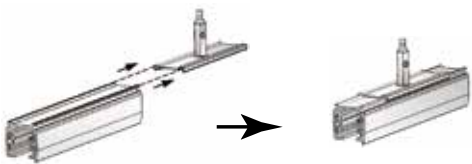


2) Rotate right the EZCLICK Kit and fix it on the rod.

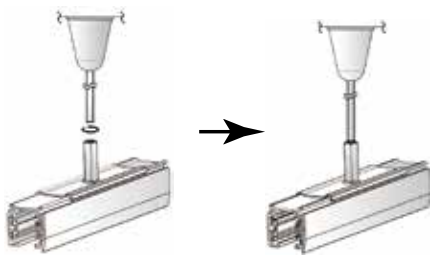


Suspension Mounting Kits Manual

1) Put the Track into the EZCLICK Mounting Kits parallelly (As picture shows).

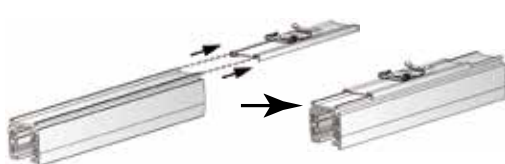

2) Adjust the EZCLICK Mounting Kit's direction, put the track vertically into the EZCLICKMounting Kit, rotate right and fix (like picture shows).

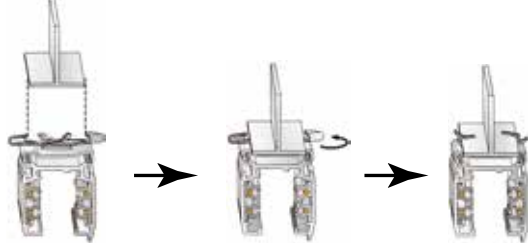

Mechanical Adaptor




Model No.	Package	Colour
Pro-0449-W	1 / 100	White
Pro-0449-S	1 / 100	Silver
Pro-0449-B	1 / 100	Black


Suspension kit



Model No.	Package	Colour
Pro-04SK-W	1 / 100	White
Pro-04SK-S	1 / 100	Silver
Pro-04SK-B	1 / 100	Black

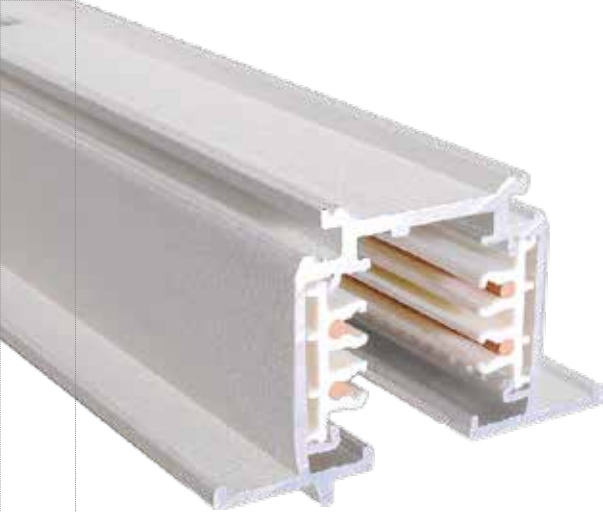


3 Circuits Recessed Track System

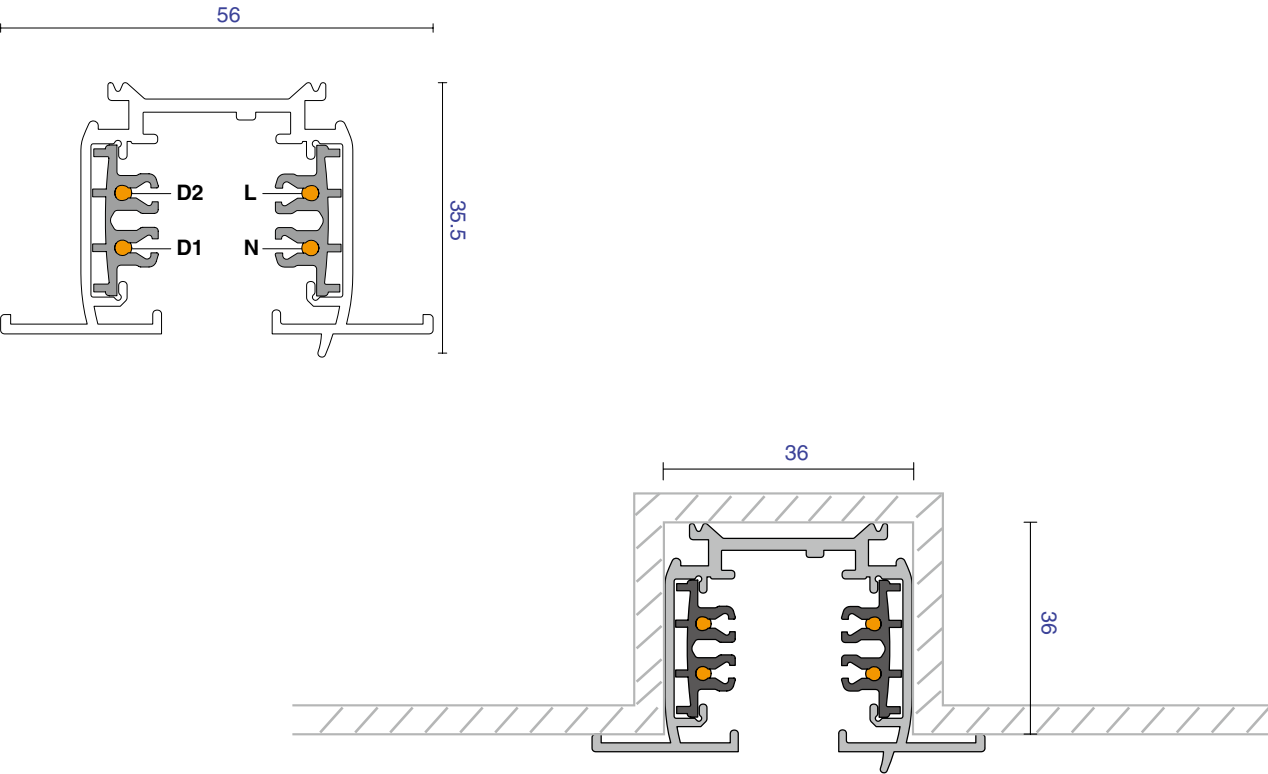


Model No.	Track length	Shell Material	Colour			Package
Pro-R410-W / Pro-R410-S / Pro-R410-B	1M track actual one meter.(100cm)	Aluminum Extrusion	White	Silver	Black	1 / 9
Pro-R415-W / Pro-R415-S / Pro-R415-B	1.5M track actual one meter.(150cm)	Aluminum Extrusion	White	Silver	Black	1 / 9
Pro-R420-W / Pro-R420-S / Pro-R420-B	2M track actual one meter.(200cm)	Aluminum Extrusion	White	Silver	Black	1 / 9
Pro-R430-W / Pro-R430-S / Pro-R430-B	3M track actual one meter.(300cm)	Aluminum Extrusion	White	Silver	Black	1 / 6
Pro-R4400-W / Pro-R4400-S / Pro-R4400-B	4M track actual one meter.(400cm)	Aluminum Extrusion	White	Silver	Black	1 / 6

Live-end Connector Cover

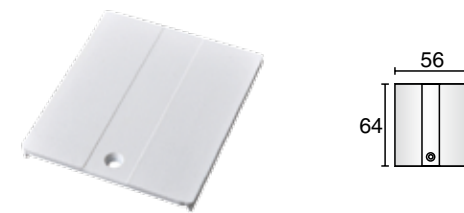

Model No.	Package	Colour
Pro-R431-W	1 / 500	White
Pro-R431-S	1 / 500	Silver
Pro-R431-B	1 / 500	Black

Live-End Connector

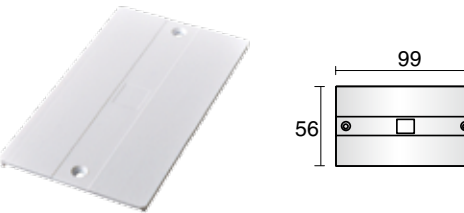

Model No.	Package	Colour
Pro-R434-W	1 / 400	White
Pro-R434-S	1 / 400	Silver
Pro-R434-B	1 / 400	Black

Mini Joiner



Model No.	Package	Colour
Pro-R435-W	1 / 400	White
Pro-R435-S	1 / 400	Silver
Pro-R435-B	1 / 400	Black

Mini Joiner(insulation)




Model No.	Package	Colour
Pro-R436-W	1 / 400	White
Pro-R436-S	1 / 400	Silver
Pro-R436-B	1 / 400	Black

End Cap




Model No.	Package	Colour
Pro-R437-W	1 / 400	White
Pro-R437-S	1 / 400	Silver
Pro-R437-B	1 / 400	Black

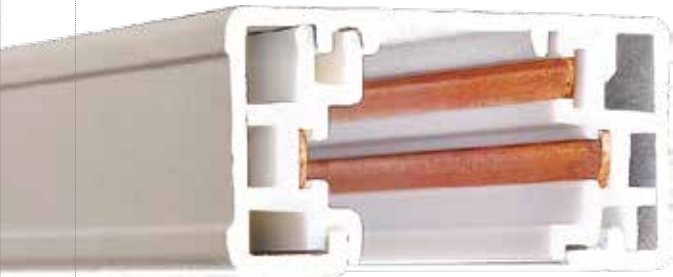

Single Circuit Track System



3 Wires



Model No.	Track length	Shell Material	Colour			Package
Pro-0310A	1M track with double end cap.(100cm)	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-0320A	2M track with double end cap.(200cm)	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-0330A	3M ttrack with double end cap.(300cm)	Aluminum Extrusion	White	Silver	Black	1 / 9
Pro-03400A	4M track with double end cap.(400cm)	Aluminum Extrusion	White	Silver	Black	1 / 9
Pro-0302A	2'track with double end cap actual length24"	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-0304A	4'track with double end cap actual length48"	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-0306A	6'track with double end cap actual length72"	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-0308A	8'track with double end cap actual length96"	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-0310B	1M track with live end & end cap.(100cm)	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-0320B	2M track with live end & end cap.(200cm)	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-0330B	3M track with live end & end cap.(300cm)	Aluminum Extrusion	White	Silver	Black	1 / 9
Pro-03400B	4M track with live end & end cap.(400cm)	Aluminum Extrusion	White	Silver	Black	1 / 9
Pro-0302B	2'track with live end and end cap actual length24"	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-0304B	4'track with live end and end cap actual length48"	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-0306B	6'track with live end and end cap actual length72"	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-0308B	8'track with live end and end cap actual length96"	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-0310C	1M track with live end & end cap.(100cm)	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-0320C	2M track with live end & end cap.(200cm)	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-0330C	3M track with live end & end cap.(300cm)	Aluminum Extrusion	White	Silver	Black	1 / 9
Pro-03400C	4M track with live end & end cap.(400cm)	Aluminum Extrusion	White	Silver	Black	1 / 9
Pro-0302C	2'track with live end and end cap actual length24"	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-0304C	4'track with live end and end cap actual length48"	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-0306C	6'track with live end and end cap actual length72"	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-0308C	8'track with live end and end cap actual length96"	Aluminum Extrusion	White	Silver	Black	1 /12

Single Circuit Recessed

3 Wires

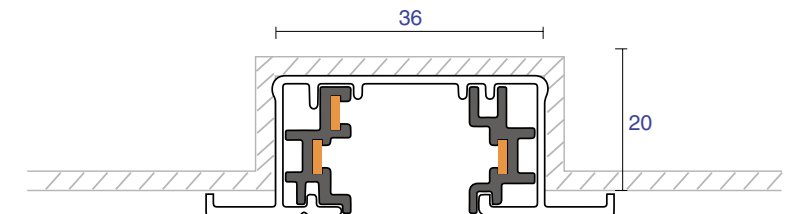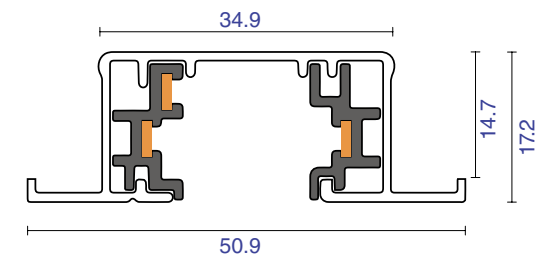


Model No.	Track length	Shell Material	Colour			Package
Pro-R310A	1M track with double end cap.(100cm)	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-R320A	2M track with double end cap.(200cm)	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-R330A	3M ttrack with double end cap.(300cm)	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-R3400A	4M track with double end cap.(400cm)	Aluminum Extrusion	White	Silver	Black	1 / 9
Pro-R302A	2'track with double end cap actual length24"	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-R304A	4'track with double end cap actual length48"	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-R306A	6'track with double end cap actual length72"	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-R308A	8'track with double end cap actual length96"	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-R310B	1M track with live end & end cap.(100cm)	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-R320B	2M track with live end & end cap.(200cm)	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-R330B	3M track with live end & end cap.(300cm)	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-R3400B	4M track with live end & end cap.(400cm)	Aluminum Extrusion	White	Silver	Black	1 / 9
Pro-R302B	2'track with live end and end cap actual length24"	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-R304B	4'track with live end and end cap actual length48"	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-R306B	6'track with live end and end cap actual length72"	Aluminum Extrusion	White	Silver	Black	1 /12
Pro-R308B	8'track with live end and end cap actual length96"	Aluminum Extrusion	White	Silver	Black	1 /12



Single Circuit Track System


2 Wires



Model No.	Track length	Shell Material	Colour
Pro-L210-W	1M / 1.5M / 2M / 3M track actual one meter. (100cm / 150cm / 200cm / 300cm)	Aluminum Extrusion	White ☐ Silver ☐ Black ☐



Model No.	Track length	Shell Material	Colour
Pro-RL210-W	1M / 1.5M / 2M / 3M track actual one meter. (100cm / 150cm / 200cm / 300cm)	Aluminum Extrusion	White ☐ Silver ☐ Black ☐

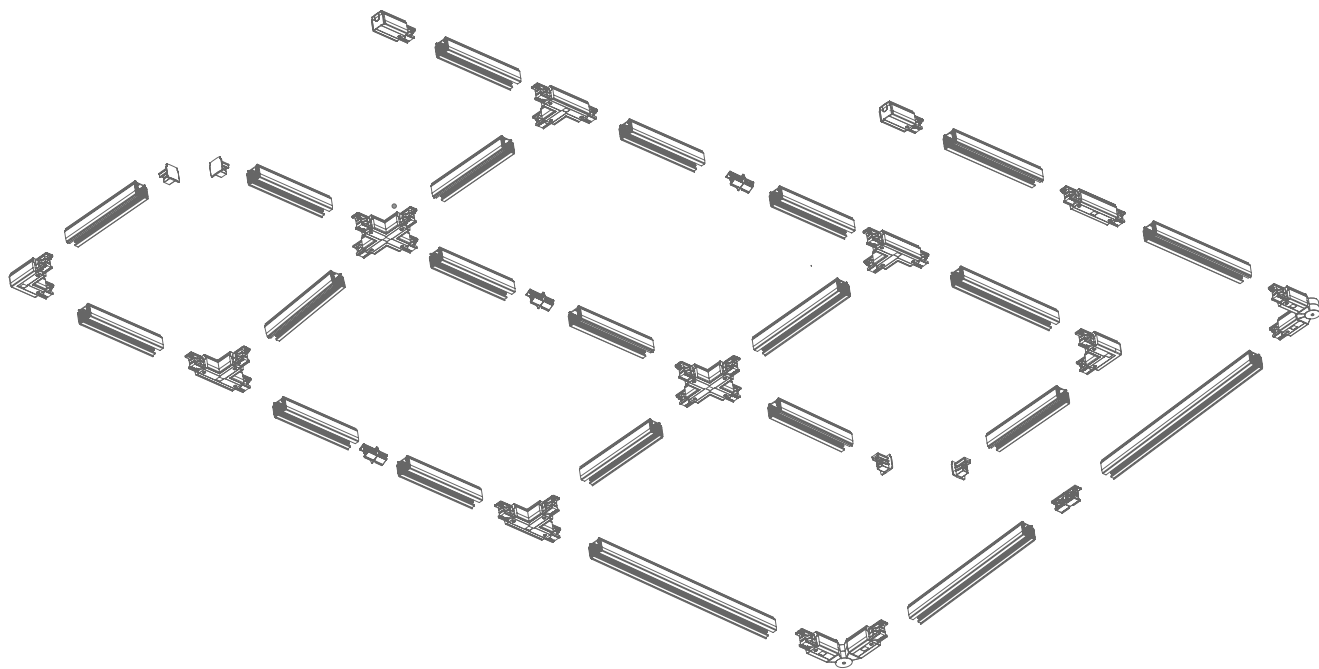

LED Track light